

10500519

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 July 2003 (10.07.2003)


PCT

(10) International Publication Number
WO 03/056237 A1

- (51) International Patent Classification⁷: **F21V 19/00** (71) Applicant (for all designated States except DE, US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (21) International Application Number: **PCT/IB02/05303**
- (22) International Filing Date:
12 December 2002 (12.12.2002) (72) Inventors; and (75) Inventors/Applicants (for US only): **TIESLER-WIT-TIG, Helmut** [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE). **WINGS, Leo** [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
102 00 831.0 2 January 2002 (02.01.2002) DE (74) Agent: **VOLMER, Georg**; Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).
- (71) Applicant (for DE only): **PHILIPS INTELLECTUAL PROPERTY & STANDARDS GMBH** [DE/DE]; Stein-damm 94, 20099 Hamburg (DE). (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,

[Continued on next page]

(54) Title: LAMP AND HEADLIGHT FOR SIMPLE MOUNTING

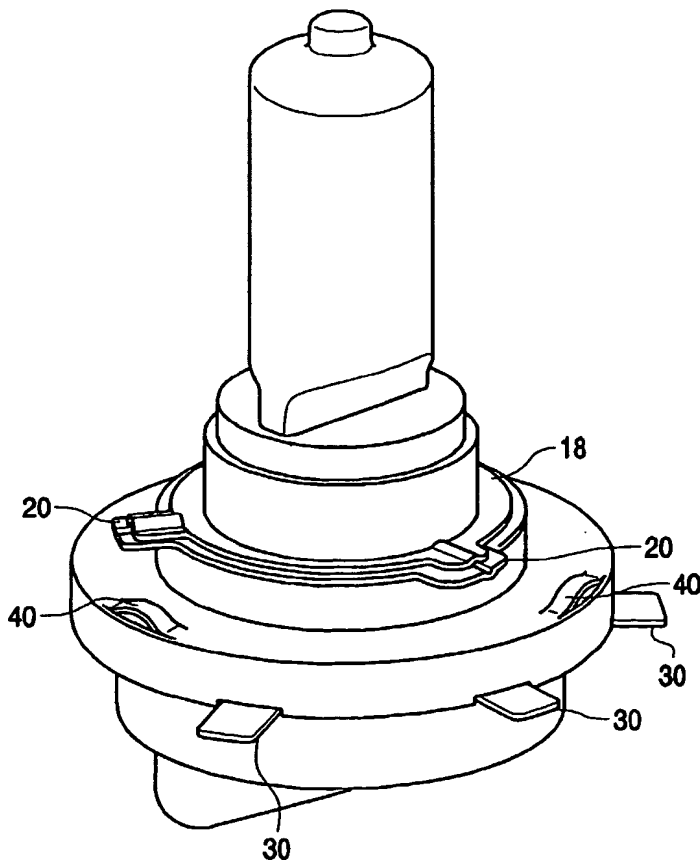

(57) Abstract: A lamp (10) and a headlight with a reflector housing (50) and a lamp (10) are disclosed. The lamp (10) has a lamp base (14) and a burner element (12), said lamp base (14) comprising locking means (20) which project transversely to the longitudinal axis of the lamp. Said means can be locked into an opening (52) of the reflector housing (50) through rotation after insertion of the lamp (10). Said rotation at the same time achieves electrical connection in that contact elements (30) projecting transversely to the longitudinal axis, preferably planar contact lugs, are brought into engagement with contact means (60) at the reflector housing, preferably contact clamps. Further embodiments of the invention relate inter alia to axially and transversely acting spring elements (40, 42) as well as to a handle (28) for rotating the lamp.

WO 03/056237 A1